



Accessories] DrainStopPlus™

Senninger's new Drain Stop Plus is specifically designed for overhead irrigation to prevent draining from applicators when system is shut down. This protects plants beneath applicators from damage and over-watering. The Drain Stop Plus allows lines to remain full to help expedite system start-up time and maximize initial zone coverage.

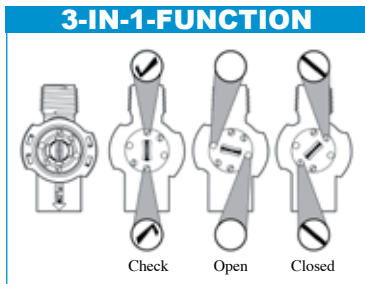

The multiple functions of Senninger's new Drain Stop Plus make it an excellent choice for overhead irrigation.



NEW!



FEATURES:

- Unique 3-mode design – open, check, and closed
- Easy clean feature – device and applicator remain in place, a simple twist releases bonnet for debris removal
- Two models available: 1/2" M NPT inlet x 1/2" F NPT outlet; 3/4" M barb inlet x 1/2" F NPT outlet
- Can be used directly on any 1/2" M NPT base applicator
- Low friction loss – less than 4.25 psi total loss through device at 5 gpm [0.29 bar at 1136 L/hr]
- Minimum opening pressure: 13.5 psi [0.93 bar]
Minimum closing pressure: 3.5 psi [0.24 bar]
- Maximum operating pressure: 50 psi [3.45 bar]
- Flow: 0.25 to 5 gpm [57 to 1136 L/hr]
- Two-year warranty on materials, workmanship AND performance

Accessories] DropAdapter

The Senninger Drop Adapter offers simple, fast and economical installation of drops.

FEATURES:

- Available as an assembly or as individual components (assembly includes: Two super barb connectors, One 1/2" slip x NPT connector, 12 inches of 0.345" tubing, 12 inches of 1/2" PVC)
- Available with either a 1/2" F slip, 3/4" M slip, or 1/2" M NPT outlet connection
- Friction loss through the assembly (24" length) is 0.67 psi at 1.5 gpm [less than 0.05 bar at 341 L/hr]

