


RECOMMENDED INSTALLATION

Quick-Connect Coupler Kit


The **Senninger Quick-Connect Coupler Kit** (QCPLASM4BRB) allows growers to adjust the drop length throughout the growing season. By using two assemblies, one above a section of hose and one beneath, the sprinkler can be mounted lower to the ground while crops are young. Then as crops grow, that section can be easily removed for the sprinkler to operate at a higher level.



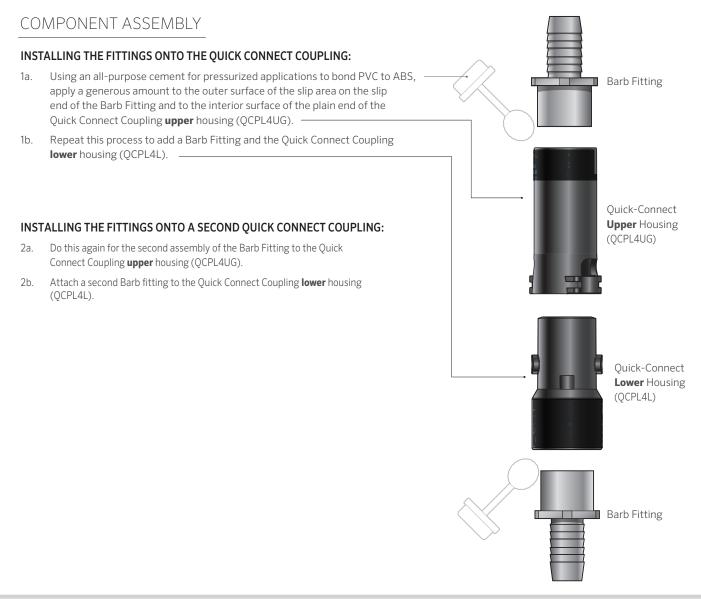

ASSEMBLING THE COMPLETE QUICK CONNECT COUPLER KIT (QCPLASM4BRB) ONTO A SECTION OF HOSE:

- 3a. Cut a section of hose to the desired length.
- 3b. Using Oetiker clamps, attach one end of the hose to the barb end of the fitting that is connected to the Quick Connect **lower** housing (QCPL4L) and the other end of the hose to the barb end of the Quick Connect **upper** housing (QCPL4UG)

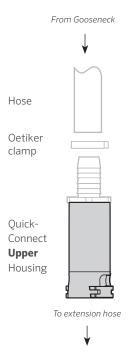

ATTACHING THE EXTENDED HOSE SECTION ONTO A DROP HOSE:

- 4a. Cut the extension hose to the required length.
- 4b. When installing the new extended hose section onto the drop hose, be sure the orientation of the connectors is the same for both the upper and the lower quick coupling barb assemblies. This is important so that when you go to change your hose height and remove this section, the Quick Connect upper housing will connect to the Quick Connect lower housing.

