

**AGRICULTURAL IRRIGATION** A Hunter Industries Company LOW PRESSURE - HIGH PERFORMANCE



- 01 | Easy to install on all Senninger center pivot sprinklers
- 02 Patented design with multiple fittings in one product.
- 03 UV-resistant thermoplastic construction prevents corrosion and deters metal theft
- **04** Weight: 0.85 lb. (0.39 kg)

## **UNIVERSAL MAGNUM WEIGHT**

Provides stability on hose drops for multiple pivot sprinklers

## FEATURES


- ¾" M x ¾" F connection
- 2.30 inches (58,4 mm)
- 3.61 inches (91,7 mm)
- Can be threaded into Pressure Regulator or a Female x Hose Barb Fitting.



## **ONE MODEL FITS MULTIPLE PIVOT SPRINKLERS**



Always be sure the Universal Magnum Weight is tightly threaded into the bottom of the i-Wob®2. 140 inch-Ibs. torque recommended.

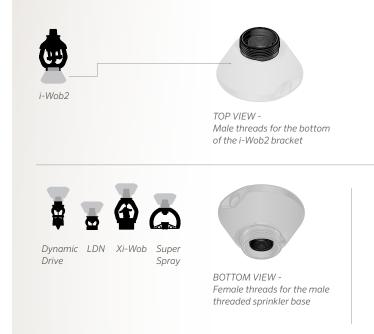



TOP VIEW -Male threads for the female threaded outlet of the pressure regulator or hose barb fitting

Website senninger.com Customer Support 407-877-5655

The Senninger commitment to world-class products, local support and technical expertise ensures we provide the most efficient and reliable agricultural irrigation solutions available in the world today.

& D ants

Steve Abernethy, President of Senninger Irrigation